

CLESSIDRA GLASS AQUA 16

14,9 KW - 18,7 KW

COLORS_



CLEAN



TECHNOLOGY



OPTIONAL



Ventilazione Frontale - Uscita Fumi Posteriore

Front Ventilation - Rear Exhaust Fume Outlet - Ventilation Avant - Sortie De Fumée Arrière - Ventilación Frontal - Salida De Humos Trasera - Front Gebläse - Rauchausgang Hinten



Potenza Globale
Global Power
Puissance globale
Potencia global
Verbrennungsleistung

KW 18,7-3,4

Rendimento totale
Total efficiency
Puissance globale
Potencia global
Pellet Wirkungsgrad

% 81,6

Potenza all'acqua
Water power
Puissance à l'eau
Potencia al agua
Wärmeleistung wassersseitig

KW 14,9

Potenza all'ambiente
Power Environment
Puissance à l'environnement
Potencia al ambiente
Raumwärmeleistung

Kw 3,8

Peso
Weight
Poids
Peso
Gewicht

Kg 195

Consumo min-MAX
Min-Max consumption
Consumation min-MAX
Consumo min-maxi
Min-Max verbrauch

Kg/H 0,7-4,4

Uscita fumi
Chimney Output
Sortie conduit de cheminée
Salida conducto de humos
Rauchauslass

mm 80

Ingresso aria
Air inlet
Entrée d'air
Entrada aire
Lufteinlass

mm 60

Serbatoio pellet
Pellet tank
Réservoir
Depósito
Tank fassungsvermögen




Kg 23

Pressione d'esercizio
Pressure
Pression de service
Presión de funcionamiento
Betriebsdruck

BAR 1,5

Assorbimento elettrico
Electrical consumption
Absorption électrique
Consumo de electricidad
Elektrischer Verbrauch

W 110

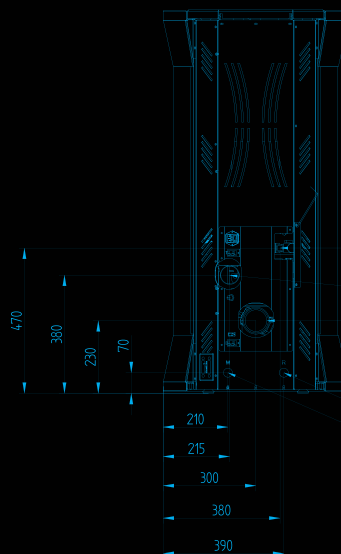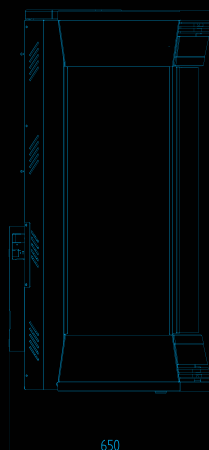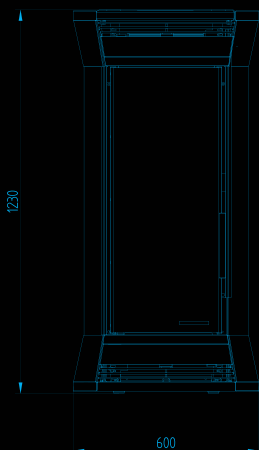

VALVOLA DI SCARICO IMPIANTO

Ø 60 mm

USCITA FUMI

Ø 60 mm

RITORNO 3/4"

MANDATA 3/4"

